

UPFLOW SAND FILTERS ARRANGEMENTS



DISC FILTERS


- Filter for removal of suspended solids.
- It has number discs attached to a rotor and each disc consist of several easily dismantled filter cassettes with filter cloth attached on the sides.
- The filter opening can be chosen from a wide range 10 to 100 µm.
- Sizing is based on maximum surface velocity of 9 m/hour

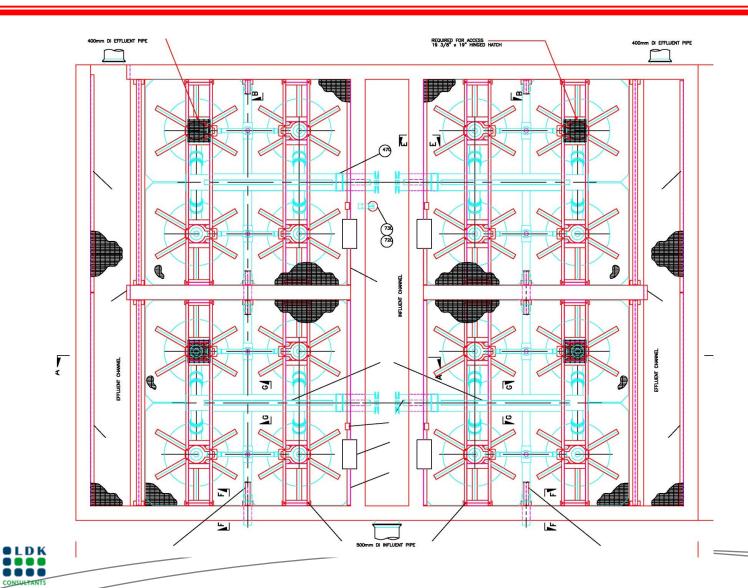






DISC FILTERS

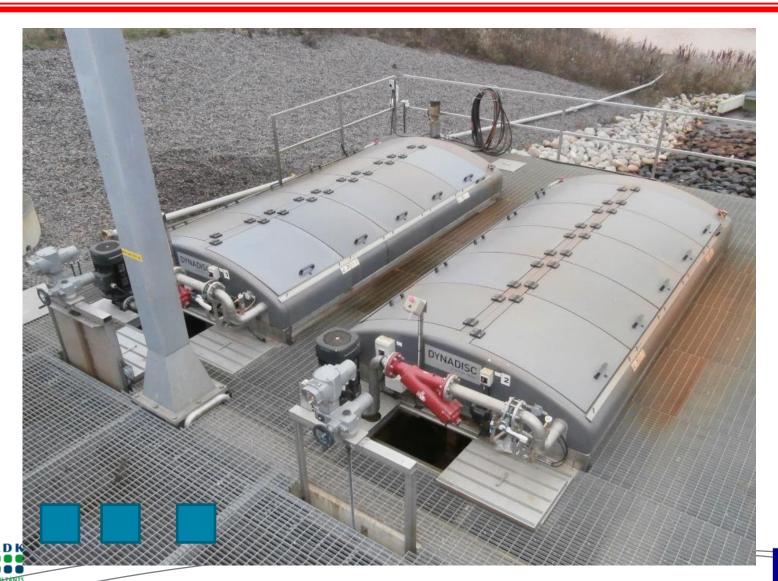


LAYOUT FOR DISC FILTERS

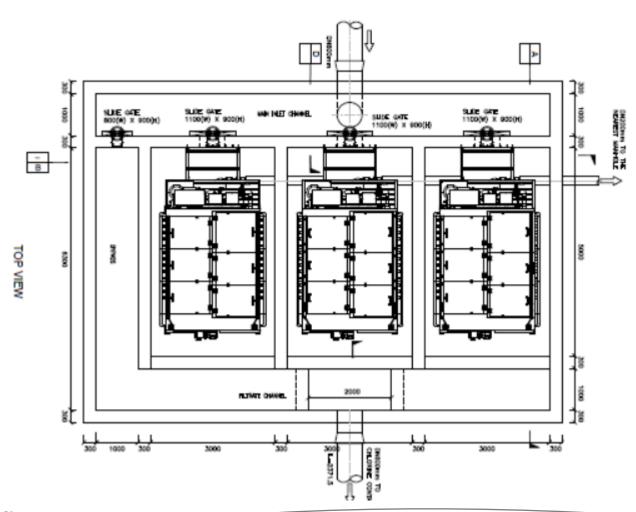





SECTIONS FOR DISK FILTERS

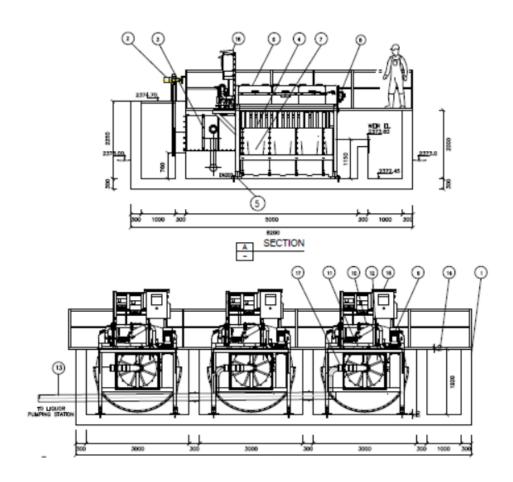





SWIM-H2020 SM

For further information

Website

www.swim-h2020.eu E: info@swim-h2020.eu

LinkedIn Page

SWIM-H2020 SM LinkedIn

Facebook Page

SWIM-H2020 SM Facebook





SWIM and Horizon 2020 Support Mechanism

Working for a Sustainable Mediterranean, Caring for our Future

Thank you for your attention.

This Project is funded by the European Union

























